

LUMENSOURCE


FOUNTAIN LED 30 SERIES

The Fountain LED 30 series uses a patented double layer Die-cast aluminum with brass heat sink inserts. The optional accessories include recessed box or quick screw-in bracket provides high performance, energy saving, and long lasting light output underwater lighting needs.



SPECIFICATIONS

Wattage	30W
Voltage	12V DC
Average Lifetime	> 50,000 hrs
Colors	Warm White (3,000K) Cool White (5,000K)
Luminous Flux	1,500 lm (WW); 1,800 lm (CW)
Beam Angle	30 degrees
Dimensions	2.5" dia / 3.42" length
Dimmability	Magnetic Low Voltage (CW & WW) (RGB Controller for Color change)
LED	30

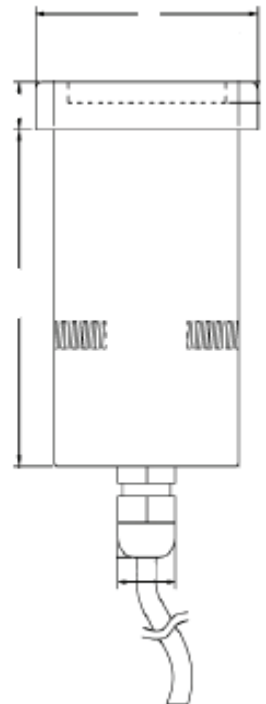

ORDERING INFO

- FUL30-X
 - C – Cool White
 - W – Warm White
 - RGB – RGB

