



# LUMENSOURCE




## FLOOD LIGHT 50W ECONOMY SERIES

The LED flood light uses only 50W compared to a 150W traditional metal halide light source. The flood light will have mounting bracket that can be screwed to any indoor or outdoor location that requires a high performance, energy saving, and long lasting light output.

### SPECIFICATIONS

Wattage	50W
Voltage	120V AC
Average Lifetime	> 50,000 hrs
Colors	Warm White (3,000K) Cool White (5,000K)
Luminous Flux	1,803 lm (W); 2,232 lm (C)
Beam Angle	120 degrees
Dimensions	11.3"L x 9.3"W x 7"H
LED	50

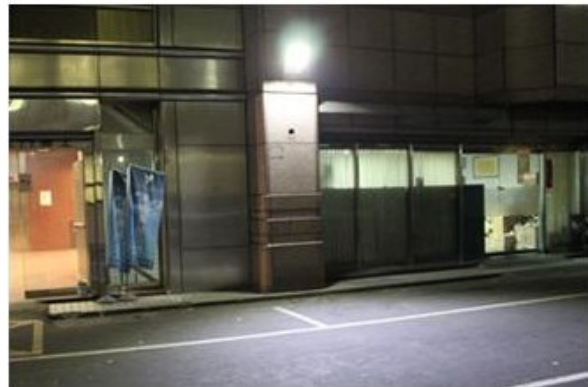

### ORDERING INFO

- FEL-50-X
  - C – Cool White
  - W – Warm White

