




LUMENSOURCE

RF TOUCH CONTROLLER SERIES

RF touch controller adopts the advanced micro control unit, it is used for controlling a variety of lamp whose source of light is LED. Meanwhile, you can adjust brightness, static color choices and various dynamic changes in lighting effects through handheld wireless touch remote control. And according to the actual need of customers, it can carry out jumpy changing, gradual changing, stroboflash and other effects of change.

SPECIFICATIONS

Supply voltage	DC12V~24V
Output	3 channels
Connecting mode	common anode
Controller dimension	5.00 x 1.60 x 1.26 in
Remote dimension	4.45 x 2.16 in
Output gray	256 levels (RGB each)
Output current	<6A (each channel)
Output power	12V:<216W, 24V:<432W
Frequency of RF remote control	433.9MHz

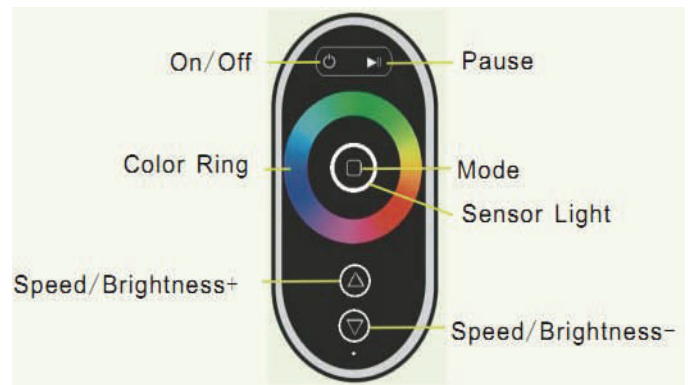

FUNCTIONS

- Pause or Continue
- Speed/ Brightness Control
- 9 Modes (Static Warm White, Static Cool white, White Breath, Seven-color Jumping, Seven-color Smooth, Seven-color Fade, R/B crossfade, B/G crossfade, G/R crossfade)
- Color ring controls color

ORDERING INFO

- RGB-TC-RFB

