


LUMENSOURCE

FOUNTAIN LED 60 SERIES

The Fountain LED 60 series uses a patented double layer Die-cast aluminum with brass heat sink inserts. The optional accessories include recessed box or quick screw-in bracket provides high performance, energy saving, and long lasting light output underwater lighting needs.

SPECIFICATIONS

Wattage	60W
Voltage	24V DC
Average Lifetime	> 50,000 hrs
Colors	Warm White (3,000K) Cool White (5,000K)
Luminous Flux	3,000 lm (WW); 3,600 lm (CW)
Beam Angle	30 degrees
Dimensions	3.51" dia / 4.6" length
Dimmability	Magnetic Low Voltage (CW & WW) (RGB Controller for Color change)
LED	60

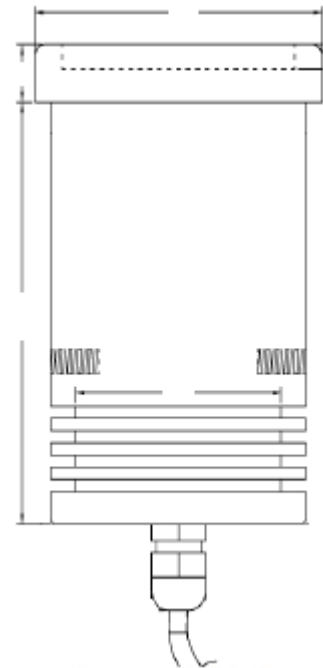

ORDERING INFO

- FUL60-X
 - C – Cool White
 - W – Warm White
 - RGB – RGB

