



LUMENSOURCE



MODULE SERIES

The high brightness Module LED can be used for back lighting channels on signages and exit signs or for replacing neon lighting. The modules can be easily screwed or adhered on to channel surfaces without the need for tedious labor work on installation. Modules are rigid and virtually maintenance free providing high performance, energy saving, and long lasting light output.



Back Lighting Applications

SPECIFICATIONS


Wattage	0.5W
Voltage	12V DC
Average Lifetime	> 20,000 hrs
Colors	Warm White (2,700K) Cool White (5,000K)
Beam Angle	120 degrees
Dimensions	2.75"L x 0.75"W x 0.25"H
LED	3




Halo Applications



Lettering Applications

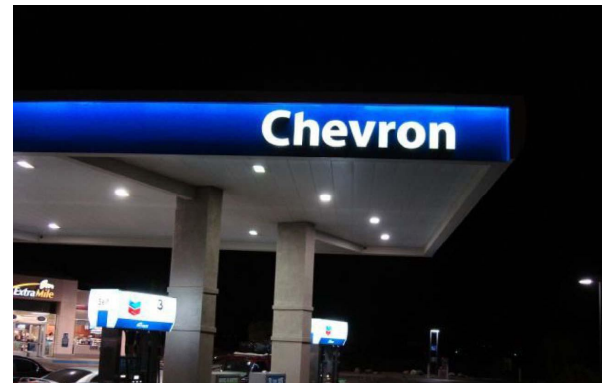

Linear Applications

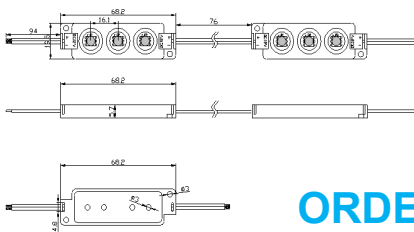

ORDERING INFO

- CM-IP3-X (Warm or Cool)

