

LUMENSOURCE

MCL PAR SERIES

The PAR LED bulb can be a replacement for all your multi-color needs, all in 1 bulb. The 4 preprogrammed color-changing modes, and display of 16 different colors, are easily utilized with the touch of a button. The remote control is used to select the single color or set the color changing modes and also power switch. Another added standard feature in the remote is the extra buttons for warm white and cool white. The RGB gradient is an optional selection in the remote that let's you fine tune and control the brightness of each RED, BLUE, and GREEN color.





PAR30



PAR38

SPECIFICATIONS

Wattage	PAR30 15W PAR38 18W
Voltage	110V-240V AC (E26)
Average Lifetime	> 50,000 hrs
Colors	16, RGB mixture, WW, CW
LED	PAR30: 5 PAR38: 6
Beam Angle	160 degrees
PAR30 Dimensions	3.5" dia / 3.7" length
PAR38 Dimensions	4.75" dia / 4.7" length

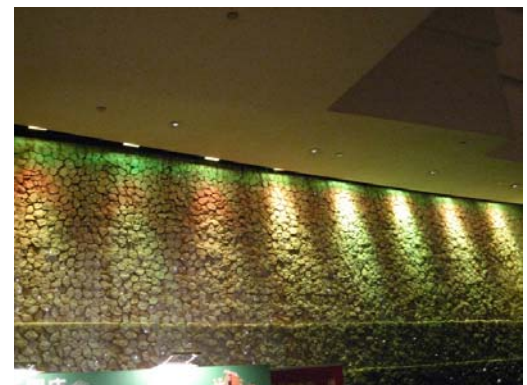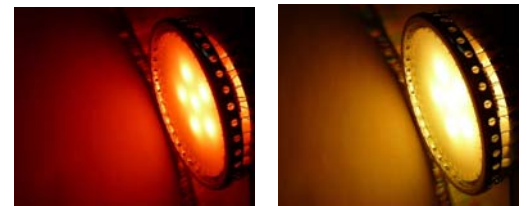

ORDERING INFO

- Standard Remote Control: IRC160-L2
- PAR30: MCL-PAR30-RGB
- PAR38: MCL-PAR38-RGB
- *GU10 Base also available

REMOTE CONTROL OPTIONS



Standard button selections include Warm white and Cool white colors

Optional RGB fine tune let's you control brightness of each RED, GREEN, BLUE



Remote Control

